

Absolute encoders – singleturn


**Compact
magnetic**

Sendix M3651A / M3671A (shaft / hollow shaft) Analog



The Sendix M3651A and Sendix M3671A singleturn encoders with analog interface and magnetic sensor technology are particularly flexible in use due to their diverse interfaces and measuring ranges.

A green LED as reference point and a red LED as error indicator simplify both installation and error diagnosis.

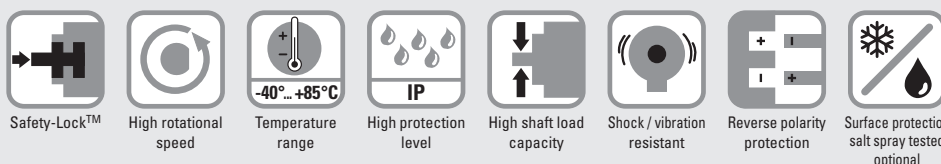

Reliable and insensitive

- Sturdy bearing construction in Safety-Lock™ design for resistance against vibration and installation errors.
- Reduced number of components ensures magnetic insensitivity.
- IP67 protection and wide temperature range -40 °C ... +85 °C.

Application oriented

- Current output 4 ... 20 mA.
- Voltage output 0 ... 10 V or 0 ... 5 V.
- Different measuring ranges.
- Set input for easy start-up.

Order code Shaft version

8.M3651A.XXXX.XXX2
Type

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

- 1 = clamping flange, IP67, ø 36 mm [1.42"]
- 3 = clamping flange, IP65, ø 36 mm [1.42"]
- 2 = synchro flange, IP67, ø 36 mm [1.42"]
- 4 = synchro flange, IP65, ø 36 mm [1.42"]

b Shaft (ø x L), with flat

- 1 = ø 6 x 12.5 mm [0.24 x 0.49"]
- 3 = ø 8 x 15 mm [0.32 x 0.59"]
- 5 = ø 10 x 20 mm [0.39 x 0.79"]
- 2 = ø 1/4" x 12.5 mm [0.49"]

c Output circuit ¹⁾

- 3 = current output
- 4 = voltage output

d Type of connection

- 1 = axial cable, 1 m [3.28'] PVC
- A = axial cable, special length PVC *)
- 2 = radial cable, 1 m [3.28'] PVC
- B = radial cable, special length PVC *)
- 3 = axial M12 connector, 5-pin
- 4 = radial M12 connector, 5-pin
- *) Available special lengths (connection types A, B):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.M3651A.433A.3112.0030 (for cable length 3 m)

e Interface / resolution / supply voltage

- 3 = 4 ... 20 mA / 12 bit / 10 ... 30 V DC
- 4 = 0 ... 10 V / 12 bit / 15 ... 30 V DC
- 5 = 0 ... 5 V / 11 bit / 10 ... 30 V DC

f Measuring range

- 1 = 1 x 360°
- 2 = 1 x 180°
- 3 = 1 x 90°
- 4 = 1 x 45°

g Counting direction

- 1 = cw
- 2 = ccw

Optional on request

- Ex 2/22 (only for connection types 3 and 4)
- surface protection salt spray tested

1) Output circuit "3" only in conjunction with interface "3", output circuit "4" only in conjunction with interface "4" or "5".

Absolute encoders – singleturn

Compact magnetic	Sendix M3651A / M3671A (shaft / hollow shaft)	Analog
-------------------------	--	---------------

Order code Hollow shaft	8.M3671A Type	.XXXX.XXXX2 a b c d e f g	If for each parameter of an encoder the <u>underlined preferred option</u> is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days. 10 by 10			
a <i>Flange</i> <u>2 = with stator coupling, IP65, ø 46 mm [1.81"]</u> 3 = with spring element, long, IP65 5 = with stator coupling, IP67, ø 46 mm [1.81"] 6 = with spring element, long, IP67	b <i>Blind hollow shaft</i> (insertion depth max. 18.5 mm [0.73"]) 1 = ø 6 mm [0.24"] 3 = ø 8 mm [0.32"] <u>4 = ø 10 mm [0.39"]</u> 2 = ø 1/4"	c <i>Output circuit ¹⁾</i> <u>3 = current output</u> <u>4 = voltage output</u>	d <i>Type of connection</i> 1 = axial cable, 1 m [3.28'] PVC A = axial cable, special length PVC *) 2 = radial cable, 1 m [3.28'] PVC B = radial cable, special length PVC *) 3 = axial M12 connector, 5-pin <u>4 = radial M12 connector, 5-pin</u> *) Available special lengths (connection types A, B): 2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm Ex.: 8.M3671A.243A.3112.0030 (for cable length 3 m)	e <i>Interface / resolution / supply voltage</i> <u>3 = 4 ... 20 mA / 12 bit / 10 ... 30 V DC</u> <u>4 = 0 ... 10 V / 12 bit / 15 ... 30 V DC</u> 5 = 0 ... 5 V / 11 bit / 10 ... 30 V DC	f <i>Measuring range</i> <u>1 = 1 x 360°</u> 2 = 1 x 180° 3 = 1 x 90° 4 = 1 x 45°	g <i>Counting direction</i> <u>1 = cw</u> <u>2 = ccw</u> <i>Optional on request</i> - Ex 2/22 (only for connection types 3 and 4) - surface protection salt spray tested

Mounting accessory for shaft encoders		Order no.
Coupling	Bellows coupling ø 19 mm [0.75"] for shaft 8 mm [0.32"]	8.0000.1102.0808
Mounting accessory for hollow shaft encoders		Order no.
Cylindrical pin, long for flange with spring element (flange type 3 + 6)	with fixing thread 	8.0010.4700.0000
Cables and connectors		Order no.
Preassembled cables	M12 female connector with coupling nut, 5-pin, A coded, straight open ended 2 m [6.56'] PVC cable	05.00.6081.2211.002M
Connectors	M12 female connector with coupling nut, 5-pin, A coded, straight (metal)	8.0000.5116.0000

Further Kübler accessories can be found at: kuebler.com/accessories
 Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

1) Output circuit "3" only in conjunction with interface "3", output circuit "4" only in conjunction with interface "4" or "5".

Absolute encoders – singleturn

Compact magnetic	Sendix M3651A / M3671A (shaft / hollow shaft)	Analog
-------------------------	--	---------------

Technical data

Electrical characteristics current interface 4 ... 20 mA

Supply voltage	10 ... 30 V DC
Current consumption (no load)	max. 30 mA
Reverse polarity protection of the supply voltage	yes
Short-circuit proof outputs	yes ¹⁾
Measuring range	45°, 90°, 180° or 360°
DA converter resolution	12 bit
Angular measurement deviation ²⁾	±0,5°
Temperature coefficient	< 100 ppm/K
Repeat accuracy, at 25°C [77°F]	±0.2°
Output load	at 10 V DC max. 200 Ohm at 24 V DC max. 900 Ohm at 30 V DC max. 1200 Ohm
Setting time	< 1 ms, R _{Burden} = 900 Ohm, 25°C [77°F]
LEDs (green/red)	- system status - current loop interruption – input load too high - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1°
SET input	level = +V for 1 s minimum
PowerON Time	< 1 s
Update rate	1 ms

Electrical characteristics voltage interface 0 ... 10 V / 0 ... 5 V

Supply voltage	output 0 ... 5 V 10 ... 30 V DC output 0 ... 10 V 15 ... 30 V DC
Current consumption (no load)	max. 30 mA
Reverse polarity protection of the supply voltage	yes
Short-circuit proof outputs	yes ¹⁾
Measuring range	45°, 90°, 180° or 360°
DA converter resolution	0 ... 10 V 12 bit 0 ... 5 V 11 bit
Angular measurement deviation ²⁾	±0,5°
Temperature coefficient	< 100 ppm/K
Repeat accuracy, at 25°C [77°F]	±0.2°
Current output	max. 10 mA
Setting time	< 1 ms, R _{Load} = 1000 Ohm, 25°C [77°F]
LEDs (green/red)	- system status - reference point display (only with factory settings) at cw: betw. 0° and 1° at ccw: betw. 0° and -1°
SET input	level = +V for 1 s minimum
PowerON Time	< 1 s
Update rate	1 ms

1) When the supply voltage is correctly applied.
But not output to +V. Supply voltage and sensor output signal are not galvanically isolated.
2) Over the whole temperature range.

Mechanical characteristics

Maximum speed	shaft or blind hollow shaft version without shaft seal (IP65) 6000 min ⁻¹ 3000 min ⁻¹ (continuous)
shaft or blind hollow shaft version with shaft seal (IP67)	4000 min ⁻¹ 2000 min ⁻¹ (continuous)
Starting torque at 20 °C [68 °F]	without shaft seal < 0.007 Nm with shaft seal (IP67) < 0.01 Nm
Shaft load capacity	radial 40 N axial 20 N
Weight	approx. 210 g [7.41 oz]
Protection acc. to EN 60529	IP65 or IP67
Working temperature range	-40 °C ... +85 °C [-40 °F ... +185 °F]
Materials	shaft / hollow shaft stainless steel flange aluminum housing zinc die-cast cable PVC
Shock resistance acc. to EN 60068-2-27	2500 m/s ² , 6 ms
Vibration resistance acc. to EN 60068-2-6	300 m/s ² , 10 ... 2000 Hz

SET input

Input	active HIGH
Input type	comparator
Signal level	HIGH min. 60 % of +V, max: +V (+V = supply voltage) LOW max. 30 % of +V
Input current	< 0.5 mA
Min. pulse duration (SET)	10 ms
Input delay	1 ms
New position data readable after	1 ms
Internal processing time	200 ms

The encoder can be set to zero at any position by means of a HIGH signal on the SET input. Other preset values can be factory-programmed. The SET input has a signal processing time of approx. 1 ms, after which the new position data can be read. Once the SET function has been triggered, the encoder requires an internal processing time of typ. 200 ms; during this time the supply voltage must not be switched off.

The SET function should be carried out whilst the encoder is at rest.

The number of preset value writing cycles is limited to 10,000.



If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.

Approvals

E1 compliant in accordance with	ECE guideline
UL compliant in accordance with	File no. E224618
CE compliant in accordance with	EMC Directive 2014/30/EU RoHS Directive 2011/65/EU ATEX Directive 2014/34/EU (for Ex 2/22 variants)

Absolute encoders – singleturn

Compact magnetic	Sendix M3651A / M3671A (shaft / hollow shaft)	Analog
-------------------------	--	---------------

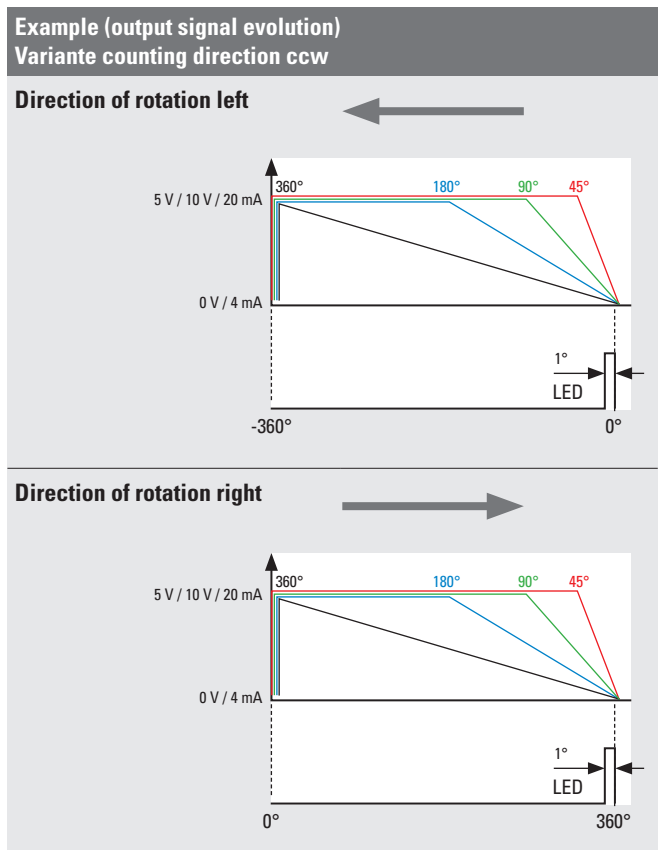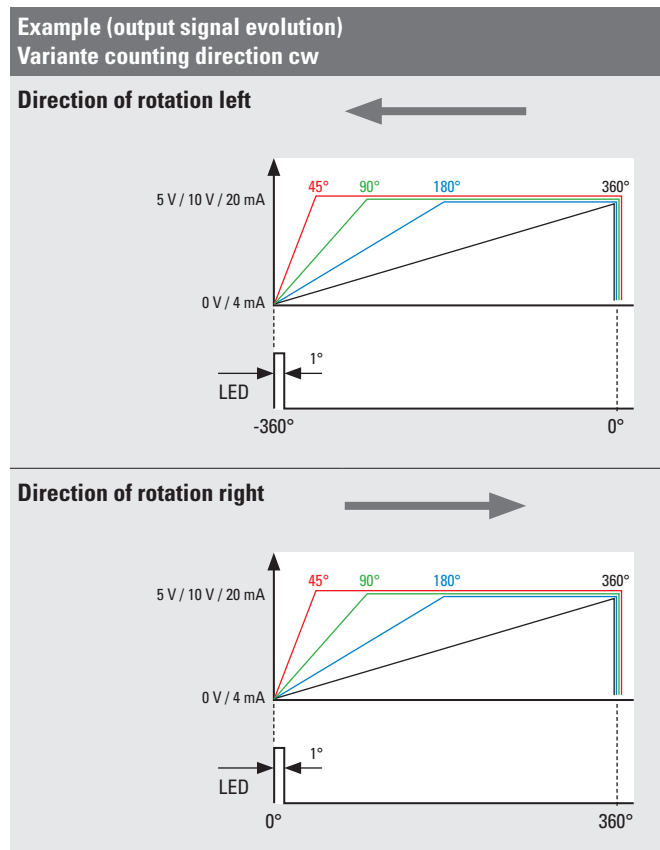


Terminal assignment

Interface	Type of connection	Cable (isolate unused cores individually before initial start-up)					
3 (current)	1, 2, A, B	Signal:	0 V	+V	+I	SET	
		Core color:	WH	BN	GN	GY	
Interface	Type of connection	M12 connector, 5 pin					
3 (current)	3, 4	Signal:	0 V	+V	+I	SET	—
		Pin:	3	2	1	5	4
Interface	Type of connection	Cable (isolate unused cores individually before initial start-up)					
4, 5 (voltage)	1, 2, A, B	Signal:	0 V	+V	+U	SET	
		Core color:	WH	BN	GN	GY	
Interface	Type of connection	M12 connector, 5 pin					
4, 5 (voltage)	3, 4	Signal:	0 V	+V	+U	SET	—
		Pin:	3	2	1	5	4

+V: Supply voltage encoder +V DC
 0 V: Supply voltage encoder ground GND (0 V)
 +U: Voltage
 +I: Current
 SET: Set input

Top view of mating side, male contact base



M12 connector, 5-pin

Absolute encoders – singleturn

Compact magnetic

Sendix M3651A / M3671A (shaft / hollow shaft)

Analog



Dimensions shaft version

Dimensions in mm [inch]

Clamping flange, $\varnothing 36$ [1.42]

Flange type 1 and 3

1 3 x M3, 6 [0.24] deep


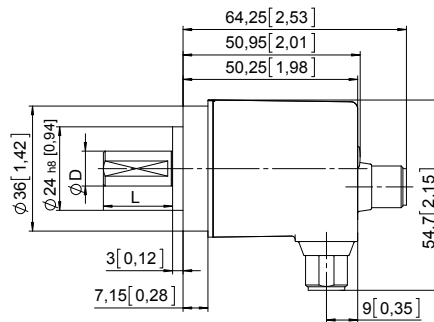


D	Fit	L
6 [0.24]	h7	12.5 [0.49]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
1/4"	h7	12.5 [0.49]

Synchro flange, $\varnothing 36$ [1.42]

Flange type 2 and 4

1 4 x M3, 6 [0.24] deep

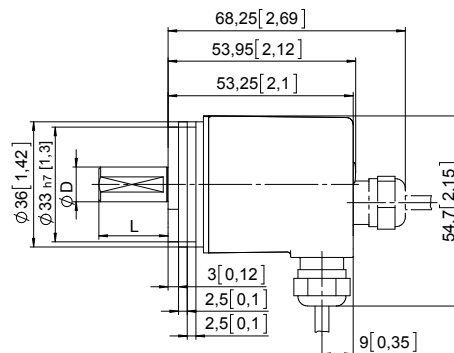

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
1/4"	h7	12.5 [0.49]

Absolute encoders – singleturn

Compact magnetic	Sendix M3651A / M3671A (shaft / hollow shaft)	Analog
------------------	---	--------

Dimensions hollow shaft version


Dimensions in mm [inch]

Flange with spring element, long Flange type 3 and 6

- 1 Slot spring element, recommendation: cylindrical pin DIN 7, $\varnothing 4$ [0.16]
- 2 Recommended torque for the clamping ring 0.7 Nm

D	Fit	L	D1
6 [0.24]	H7	18.5 [0.73]	24 [0.94]
8 [0.32]	H7	18.5 [0.73]	25.5 [1.00]
10 [0.39]	H7	18.5 [0.73]	25.5 [1.00]
1/4"	H7	18.5 [0.73]	24 [0.94]

L = insertion depth max. blind hollow shaft

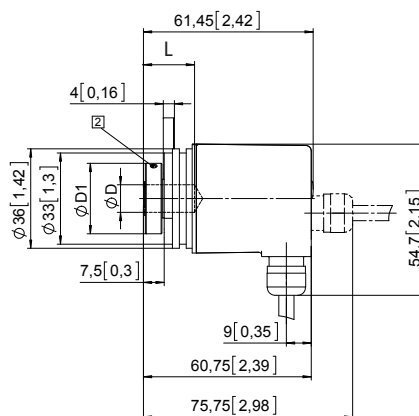

Flange with stator coupling, $\varnothing 46$ [1.81] Flange type 2 and 5

- 1 Recommended torque for the clamping ring 0.7 Nm

D	Fit	L	D1
6 [0.24]	H7	18.5 [0.73]	24 [0.94]
8 [0.32]	H7	18.5 [0.73]	25.5 [1.00]
10 [0.39]	H7	18.5 [0.73]	25.5 [1.00]
1/4"	H7	18.5 [0.73]	24 [0.94]

L = insertion depth max. blind hollow shaft

