

Absolute encoders – singleturn

Compact magnetic

Sendix M3653A / M3673A (shaft / hollow shaft)

SSI




The Sendix M36 is a magnetic singleturn encoder in compact design. It is characterized by robustness, reliability and cost-efficiency.



Safety-Lock™



High rotational speed



Temperature range
-40°C ... +85°C



High protection level
IP



High shaft load capacity



Shock / vibration resistant



Reverse polarity protection



Surface protection salt spray tested optional

Reliable and insensitive

- Sturdy bearing construction in Safety-Lock™ design for resistance against vibration and installation errors.
- Reduced number of components ensures magnetic insensitivity.
- IP67 protection and wide temperature range -40 °C ... +85 °C.

Application oriented

- Angular measurement deviation $\pm 0,5^\circ$.
- Repeat accuracy $\pm 0.2^\circ$.
- Short control cycles, clock frequency with SSI up to 2 MHz.
- Max. resolution 14 bit.

Order code Shaft version

8.M3653A.XX2X.XX12
Type

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

- 1 = clamping flange, IP67, $\varnothing$ 36 mm [1.42"]
- 3 = clamping flange, IP65, $\varnothing$ 36 mm [1.42"]
- 2 = synchro flange, IP67, $\varnothing$ 36 mm [1.42"]
- 4 = synchro flange, IP65, $\varnothing$ 36 mm [1.42"]

b Shaft ($\varnothing \times L$), with flat

- 1 = $\varnothing$ 6 x 12.5 mm [0.24 x 0.49"]
- 3 = $\varnothing$ 8 x 15 mm [0.32 x 0.59"]
- 5 = $\varnothing$ 10 x 20 mm [0.39 x 0.79"]
- 2 = $\varnothing$ 1/4" x 12.5 mm [0.49"]

c Interface / supply voltage

- 2 = SSI / 10 ... 30 V DC

d Type of connection

- 1 = axial cable, 1 m [3.28'] PUR
- A = axial cable, special length PUR *)
- 2 = radial cable, 1 m [3.28'] PUR
- B = radial cable, special length PUR *)
- 3 = axial M12 connector, 8-pin
- 4 = radial M12 connector, 8-pin

*) Available special lengths (connection types A, B):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21']
order code expansion .XXXX = length in dm
ex.: 8.M3653A.432A.G312.0030 (for cable length 3 m)

e Code

- B = SSI, binary
- G = SSI, gray

f Resolution

- A = 10 bit
- 2 = 12 bit
- 3 = 13 bit
- 4 = 14 bit

Optional on request

- Ex 2/22 (only for connection types 3 and 4)
- surface protection salt spray tested

Absolute encoders – singleturn

Compact magnetic	Sendix M3653A / M3673A (shaft / hollow shaft)	SSI
-------------------------	--	------------

Order code Hollow shaft	8.M3673A Type	.XX2X.XX12 a b c d e i	If for each parameter of an encoder the <u>underlined preferred option</u> is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days. 10 by 10
a <i>Flange</i> <u>2 = with stator coupling, IP65, ø 46 mm [1.81"]</u> 3 = with spring element, long, IP65 5 = with stator coupling, IP67, ø 46 mm [1.81"] 6 = with spring element, long, IP67	d <i>Type of connection</i> 1 = axial cable, 1 m [3.28'] PUR A = axial cable, special length PUR *) 2 = radial cable, 1 m [3.28'] PUR B = radial cable, special length PUR *) 3 = axial M12 connector, 8-pin <u>4 = radial M12 connector, 8-pin</u> *) Available special lengths (connection types A, B): 2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21'] order code expansion .XXXX = length in dm ex.: 8.M3673A.242A.G312.0030 (for cable length 3 m)	i <i>Resolution</i> A = 10 bit 2 = 12 bit <u>3 = 13 bit</u> 4 = 14 bit	<i>Optional on request</i> - Ex 2/22 (only for connection types 3 and 4) - surface protection salt spray tested
b <i>Blind hollow shaft</i> (insertion depth max. 18.5 mm [0.73"]) 1 = ø 6 mm [0.24"] 3 = ø 8 mm [0.32"] <u>4 = ø 10 mm [0.39"]</u> 2 = ø 1/4"	e <i>Code</i> B = SSI, binary <u>G = SSI, gray</u>		
c <i>Interface / supply voltage</i> <u>2 = SSI / 10 ... 30 V DC</u>			

Mounting accessory for shaft encoders		Order no.
Coupling	Bellows coupling ø 19 mm [0.75"] for shaft 8 mm [0.32"]	8.0000.1102.0808

Mounting accessory for hollow shaft encoders		Dimensions in mm [inch]	Order no.
Torque pin, ø 4 mm for flange with spring element (flange type 3 + 6)	with fixing thread		8.0010.4700.0000

Cables and connectors		Order no.
Preassembled cables	M12 female connector with coupling nut, 8-pin, A coded, straight open ended 2 m [6.56'] PUR cable	05.00.6051.8211.002M
Connectors	M12 female connector with coupling nut, 8-pin, A coded, straight (metal)	05.CMB 8181-0

Further Kübler accessories can be found at: kuebler.com/accessories
Further Kübler cables and connectors can be found at: kuebler.com/connection-technology

Absolute encoders – singleturn

Compact magnetic	Sendix M3653A / M3673A (shaft / hollow shaft)	SSI
-------------------------	--	------------

Technical data

Mechanical characteristics			
Maximum speed			
shaft or blind hollow shaft version without shaft seal (IP65)		6000 min ⁻¹ 3000 min ⁻¹ (continuous)	
shaft or blind hollow shaft version with shaft seal (IP67)		4000 min ⁻¹ 2000 min ⁻¹ (continuous)	
Starting torque at 20°C [68°F]			
		without shaft seal < 0.007 Nm	
		with shaft seal (IP67) < 0.01 Nm	
Shaft load capacity			
radial		40 N	
axial		20 N	
Weight			
		approx. 210 g [7.41 oz]	
Protection acc. to EN 60529			
		IP65 or IP67	
Working temperature range			
		-40 °C ... +85 °C [-40 °F ... +185 °F]	
Materials			
shaft / hollow shaft		stainless steel	
flange		aluminum	
housing		zinc die-cast	
cable		PUR	
Shock resistance acc. to EN 60068-2-27			
		2500 m/s ² , 6 ms	
Vibration resistance acc. to EN 60068-2-6			
		300 m/s ² , 10 ... 2000 Hz	

Electrical characteristics			
Supply voltage			
		10 ... 30 V DC	
Current consumption (no load)			
		max. 40 mA	
Reverse polarity protection of the supply voltage			
		yes	
Short-circuit proof outputs			
		yes ¹⁾	

SSI interface			
Output driver			
		RS485 transceiver type	
Permissible load / channel			
		max. +/- 30 mA	
Signal level			
HIGH		typ 3.8 V	
LOW with I _{Load} = 20 mA		typ 1.3 V	
Resolution			
		10 ... 14 bit	
Angular measurement deviation ²⁾			
		±0.5°	
Repeat accuracy			
		±0.2°	
Number of revolutions (multiturn)			
		max. 24 bit	
Code			
		binary or gray	
SSI clock rate			
		50 kHz ... 2 MHz	
Data refresh rate			
		2 ms	
Monoflop time			
		≤ 15 µs	
Note: If the clock cycle starts within the monoflop time a second data transfer begins with the same data. If the clock cycle starts after the monoflop time the cycle begins with the new values. The update rate is dependent on the clock speed, data length and monoflop time.			

SET input			
Input		active HIGH	
Input type		comparator	
Signal level (+V = supply voltage)		HIGH LOW	min. 60 % of +V, max: +V max. 30 % of +V
Input current		< 0.5 mA	
Min. pulse duration (SET)		10 ms	
Input delay		1 ms	
New position data readable after		1 ms	
Internal processing time		200 ms	
The encoder can be set to zero at any position by means of a HIGH signal on the SET input. Other preset values can be factory-programmed. The SET input has a signal processing time of approx. 1 ms, after which the new position data can be read via SSI. Once the SET function has been triggered, the encoder requires an internal processing time of typ. 200 ms; during this time the supply voltage must not be switched off.			
The SET function should be carried out whilst the encoder is at rest.			
The number of preset value writing cycles is limited to 10,000.			
If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.			

DIR input			
Direction input: A HIGH signal switches the direction of rotation from the default cw to ccw. This inverted function can also be factory-programmed.			
If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.			
Response time (DIR input)		1 ms	

Power-ON			
After Power-ON the device requires a time of approx. 150 ms before valid data can be read.			
Hot plugging of the encoder should be avoided.			

Approvals			
UL compliant in accordance with		File no. E224618	
CE compliant in accordance with			
EMC Directive		2014/30/EU	
RoHS Directive		2011/65/EU	
ATEX Directive		2014/34/EU (for Ex 2/22 variants)	

1) Short circuit proof to 0 V or to output when supply voltage correctly applied.

2) Over the whole temperature range.

Absolute encoders – singleturn

Compact magnetic	Sendix M3653A / M3673A (shaft / hollow shaft)	SSI
-------------------------	--	------------


Terminal assignment

Interface	Type of connection	Features	Cable (isolate unused cores individually before initial start-up)									
2	1, 2, A, B	SET, DIR	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	⊥
			Core color:	WH	BN	GN	YE	GY	PK	BU	RD	shield

Interface	Type of connection	Features	M12 connector, 8-pin									
2	3, 4	SET, DIR	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	⊥
			Pin:	1	2	3	4	5	6	7	8	PH

+V: Supply voltage encoder +V DC
 0 V: Supply voltage encoder ground GND (0 V)
 C+, C-: Clock signal
 D+, D-: Data signal
 SET: Set input
 DIR: Direction input
 PH ⊥: Plug connector housing (shield)

Top view of mating side, male contact base



M12 connector, 8-pin



Dimensions shaft version

Dimensions in mm [inch]

Clamping flange, ø 36 [1.42]

Flange type 1 and 3

1 3 x M3, 6 [0.24] deep


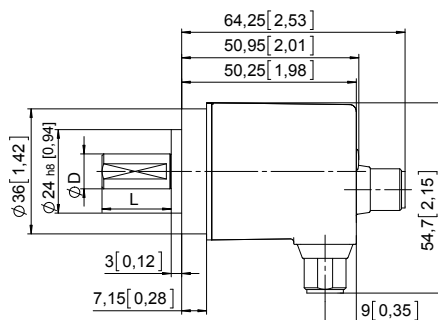


D	Fit	L
6 [0.24]	h7	12.5 [0.49]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
1/4"	h7	12.5 [0.49]

Synchro flange, ø 36 [1.42]

Flange type 2 and 4

1 4 x M3, 6 [0.24] deep

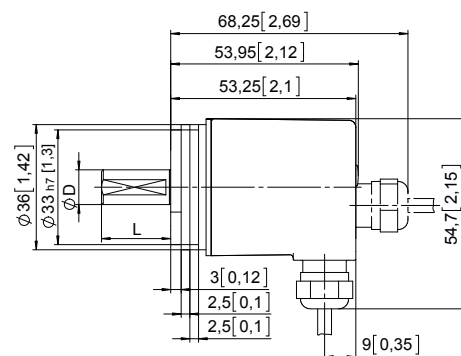

D	Fit	L
6 [0.24]	h7	12.5 [0.49]
8 [0.32]	h7	15 [0.59]
10 [0.39]	f7	20 [0.79]
1/4"	h7	12.5 [0.49]

Absolute encoders – singleturn

Compact magnetic

Sendix M3653A / M3673A (shaft / hollow shaft)

SSI

Dimensions hollow shaft version



Dimensions in mm [inch]

Flange with spring element, long Flange type 3 and 6

- 1 Slot spring element, recommendation: torque pin DIN 7, $\varnothing 4$ [0.16]
- 2 Recommended torque for the clamping ring 0.7 Nm

D	Fit	L	D1
6 [0.24]	H7	18.5 [0.73]	24 [0.94]
8 [0.32]	H7	18.5 [0.73]	25.5 [1.00]
10 [0.39]	H7	18.5 [0.73]	25.5 [1.00]
1/4"	H7	18.5 [0.73]	24 [0.94]

L = insertion depth max. blind hollow shaft

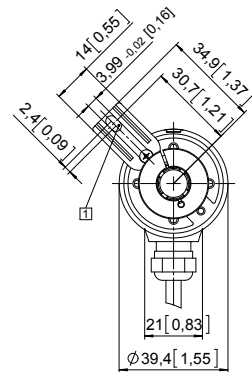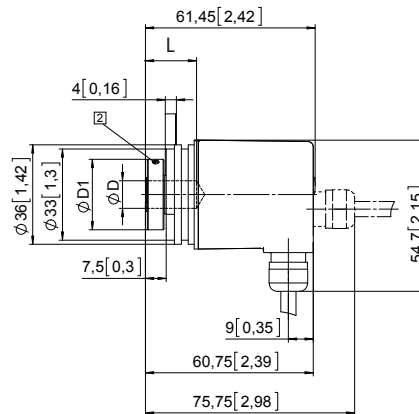

Flange with stator coupling, $\varnothing 46$ [1.81] Flange type 2 and 5

- 1 Recommended torque for the clamping ring 0.7 Nm

D	Fit	L	D1
6 [0.24]	H7	18.5 [0.73]	24 [0.94]
8 [0.32]	H7	18.5 [0.73]	25.5 [1.00]
10 [0.39]	H7	18.5 [0.73]	25.5 [1.00]
1/4"	H7	18.5 [0.73]	24 [0.94]

L = insertion depth max. blind hollow shaft

